



## VDSL Miniature SMD Transformer

### Features

- Complies with requirements of IEC60950, EN60950, UL60950/ CSA60950 and AS/NZS60950
- Low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- Excellent quality at extremely competitive price due to high volume production
- Manufactured in ISO-9001 approved Talema facility

### Electrical Specifications

Ratings @ 25°C ambient

Minimum Isolation Voltage: 1500Vrms for 1 minute

Operating Temperature Range: -40° to +85°C

Storage Temperature: -25°C to +125°C

Supplementary insulation for a primary circuit at 250Vrms working voltage



Inductance & Leakage measured at 100kHz, 10mV<sub>AC</sub>

Standard Packaging: Tape & Reel


Weight: 2.5 g

### VDSL Transformer


Part Number	OCL (µH Min.)	Pins	Turns ratio ±2%	DCR (mOhms) Max.	Line Impedance	Leakage Inductance	V <sub>P</sub> (Vrms)
82312	95µH 430µH 125µH 95µH	16-14 11-9 3-1 6-8	(16-14):(1-3):(15-13) = 9:10:10 (11-9):(6-8):(10-12) = 19:9:9	350	100 ohms	0.2µH max., 16-14 (s.c.15+1, 3+13) 0.8µH max., 11-9 (s.c.12+8, 6+10)	1500

### Dimensions & Schematics


#### Package

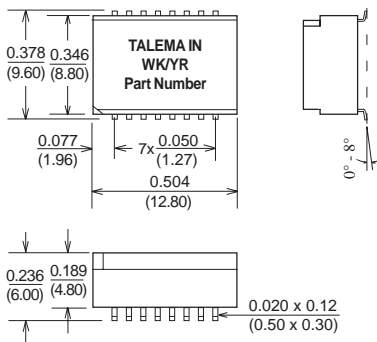

#### Suggested Pad Layout



#### Schematic



## Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

#### Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.  
Chebská 27  
322 00 Plzeň  
Tel: Int. + 420 37 - 744 9303  
Fax: Int. + 420 37 - 744 3697  
Email: talema@talema.cz

#### Germany

TALEMA ELEKTRONIK GMBH  
Sembdnerstr. 5, Postfach 2523  
82110 Germering  
Tel: Int. + 49 89 - 841 00 - 0  
Fax: Int. + 49 89 - 841 00 25  
Email: info@talema.de

#### Ireland

NUVOTEM TEO.  
Crolly  
Co. Donegal  
Tel: Int. + 353 74 - 954 8666  
Fax: Int. + 353 74 - 954 8139  
Email: info@nuvotem.com

#### India

TALEMA ELECTRONIC PVT. LTD.  
Opposite the SIDCO Industrial Estate  
Gins Towers  
4/5S.H/1, Omalur Main Road  
Salem - 636 004, Tamil Nadu  
Tel: Int. + 91 427 - 244 1325  
Fax: Int. + 91 427 - 243 0034  
E-mail: talema@talemaindia.com